

Public Address 2CH Stereo Pre Amplifier

Features

- Controls
 - Front : 2 Channel Mic/Line and 6 Channel line input
 - 2 Stereo Output with 2 band tone control
 - Rear : 2 Channel Gain control with 3 band EQ, talkover and Phantom power switch
 - 6 Channel Gain control with Stereo / Mono switch

- Connectors
 - Euro block for 8 input
 - Euro block for 2 output
 - Euro block for priority input and EXT mute
- Indicators: Power, SIG and CLIP for each input channels and SIG -10dB, CLIP for output channel




Model

P82S

Rated Output Level / Impedance	0dB / 600 Ω Balanced
Input sensitivity / Impedance	Mic Input(CH1-2) – 60dB~ – 16dB / 20K Ω Balanced Line Input(CH1-6) – 20dB~ + 4dB / 20K Ω Balanced
Frequency Response (-1dB)	20Hz – 20kHz
T.H.D	< 0.1%
Crosstalk	> 70 dB
Equalization	Mic Input High : 12 kHz $\pm$ 15 dB / Mid : 2.5 kHz $\pm$ 15 dB / Low : 80 Hz $\pm$ 15 dB Output High : 10 kHz $\pm$ 15 dB / Low : 100 Hz $\pm$ 15 dB
Hum & Noise	> 90 dB
Power Source	AC 100~240 Volt, 50~60Hz
Weight (Net)	3.33kg
Dimensions (W x H x D)	482 x 44 x 320mm

2 Zone Paging Microphone for P82S

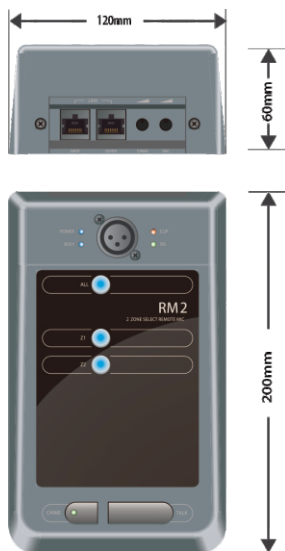

Features

- Controls
 - Zone selector switch, All & 2 Zones. Talk & Chime switch.
 - Level control volume for MIC and Chime output.
- Connectors
 - RJ45 to connect with Model P82S.
- Indicators: Power, Busy, Signal, Clip.



Model

RM-2

Rated Output Level / Impedance	0dB / 600 Ω Balanced
Input sensitivity / Impedance	-36dB / 20k Ω Balanced
Frequency Response (-1dB)	80Hz – 15kHz
T.H.D	< 0.1%
Hum & Noise	> 90 dB
Number of Zone	2 Zones
Weight (Net)	750g
Dimensions (W x H x D)	120 x 60 x 200mm (only body)